


156x156mm 6x9 Cells

Polycrystalline Solar Module

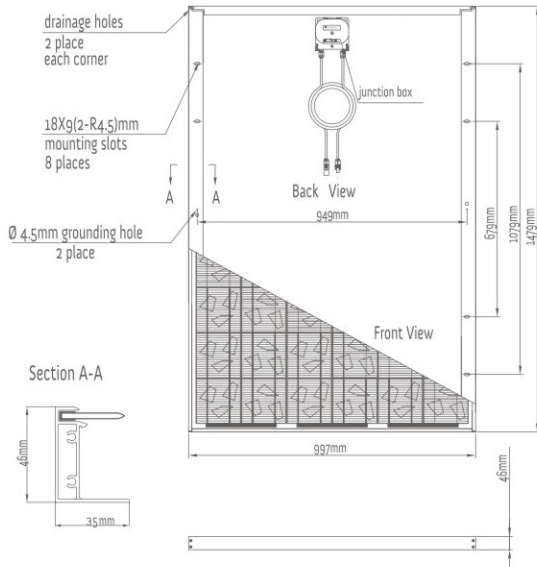

► Electrical characteristics

UL-210P-54	UL-215P-54	UL-220P-54	UL-225P-54	TUV-Model
UL-210P	UL-215P	UL-220P	UL-225P	UL-Model
210	215	220	225	Max. Power Pm (W)
26.9	27.0	27.1	27.2	Max. Power Voltage Vm (V)
7.81	7.97	8.12	8.28	Max. Power Current Im (A)
33.2	33.4	33.5	33.8	Open-Circuit Voltage Voc (V)
8.32	8.38	8.52	8.64	Short-Circuit Current Isc (A)
16.0	16.4	16.7	17.1	Cell Efficiency
14.2	14.6	14.9	15.3	Module Efficiency
0~+3%				Power Tolerance
1000 (TUV) / 600 (UL)				Max. System Voltage (V)
+0.065%/°C				Temperature Coefficient of Isc
-0.330%/°C				Temperature Coefficient of Voc
-0.403%/°C				Temperature Coefficient of Pmax
-40°C~+85°C				Operating Temperature
45±2°C				NOCT
15				Series Fuse Rating (A)

STC: irradiance: 1000 W/m²; Solar spectrum: AM 1.5; cell temperature: 25°C

► Guarantee

- 10-year product guarantee
- 12-year performance guarantee at 90% power output
- 25-year power guarantee at 80% power output


► Note

- Nominal operating cell temperature above data is only for reference
- Deviation of Vm(V), Im(A), Voc(V) and ISC(A) of ± 10%
- Due to continuous Innovation, research and improvement, the specification is subject to change without prior notice.


► Mechanical characteristics

1479x997x46	Module Dimension (mm)
156x156	Cell Dimension (mm)
6x9	Array (PCS)
17.5	Weight (kg)

► I-V Curves

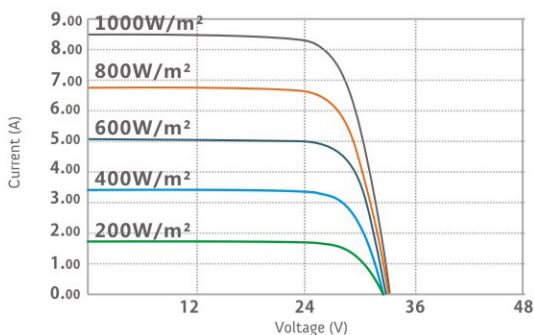

I-V Curves at different irradiance

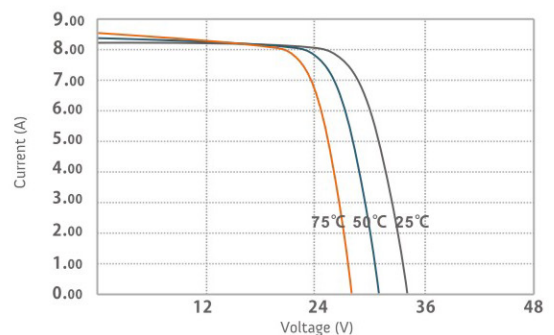

I-V Curves at different temperature