


MONO HALF-CUT MODULE UL-365 | 370 | 375M-120HV



Anti-PID (potential induced degradation)
Passed anti-PID test under 85°C damp heat
85% relative humidity for 96 hours

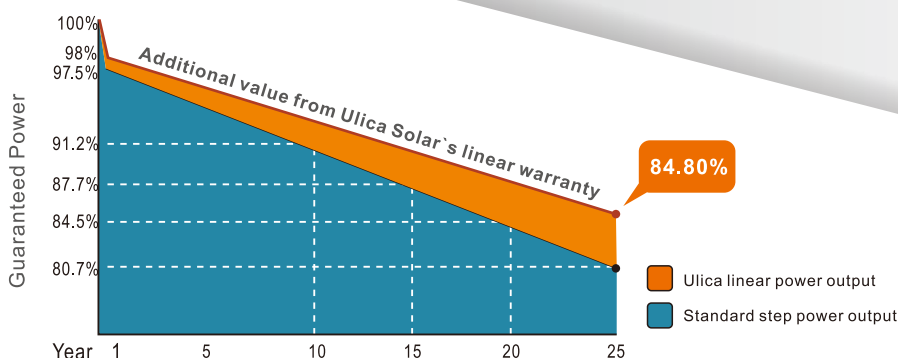

Great Durability against extreme conditions
Passed salt mist corrosion test, ammonia corrosion test
dust & sand test, fire test, all certified by TÜV



Lower LCOE
Lower shading and resistive loss
Lower temperature coefficient



Outstanding mechanical load resistance
2400 Pa wind load, 5400 Pa snow load



CEC Listed



- IEC 61215, IEC 61730
- ISO 9001: 2015 (Quality management systems)
- ISO 14001: 2015 (Environmental management systems)
- ISO 45001: 2018 (Occupational health and safety)
- UNI 9177 la CLASSE DI REAZIONE AL FUOCO: 1

Add: No. 238 Yunlin Middle Road, Wangchun Industrial District, Ningbo China

Tel: +86-574-28828939

Email: sales@ulsolar.com.cn

Fax: +86-574-28828997

Web: www.ulicasolar.com



ELECTRICAL PERFORMANCE

Electrical Parameters Standard Test Conditions

Module Type	UL-365M-120HV	UL-370M-120HV	UL-375M-120HV
Power Output	P _{max} W 365	370	375
Power Tolerance	ΔP _{max} W	0/+5	
Module Efficiency	η m %	20.04	20.31
Voltage at P _{max}	V _m V	34.0	34.1
Current at P _{max}	I _m A	10.74	10.85
Open-Circuit Voltage	V _{oc} V	41.3	41.4
Short-Circuit Current	I _{sc} A	11.30	11.41

STC:1000W/m² irradiance,25°C module temperature,AM1.5

THERMAL CHARACTERISTICS

Nominal Operating Cell Temperature	NOCT	°C	43±2
Temperature Coefficient of P _{max}	γ	%/°C	-0.340
Temperature Coefficient of V _{oc}	β	%/°C	-0.290
Temperature Coefficient of I _{sc}	α	%/°C	+0.049

OPERATING CONDITIONS

Max.System Voltage	DC1500V
Max.Series Fuse Rating	20A
Operating Temperature Range	-40°C~85°C
Max static snow load	5400Pa
Max static wind load	2400Pa
Application Class	A

CONSTRUCTION MATERIALS

Front Cover(material/type/thickness)	low-iron tempered glass/3.2mm
Cell(quantity/material/type/dimension)	120/monocrystalline/166X83mm
Encapsulant(material)	ethylene vinyl acetate(EVA)
Frame(material/anodization color)	anodized aluminum alloy/silver or black
Junction Box(protection degree)	IP68
Cable(length/cross-sectionalarea)	4mm ² Landscape: (+) 1100mm/(-)1100 mm or Customized Length
Plug Connector	MC4 compatible

GENERAL CHARACTERISTICS



Dimension(L/W/H)	1755/1038/30mm
Weight	20kg

PACKING CONFIGURATION



Pallet Size(L/W/H)	1795/1130/2350mm
Pallet Weight	1510kg
Pieces per Pallet	72pcs
Pieces per Container	936pcs

I-V CURVE

I-V characteristics at different irradiances (reference to 370 W)

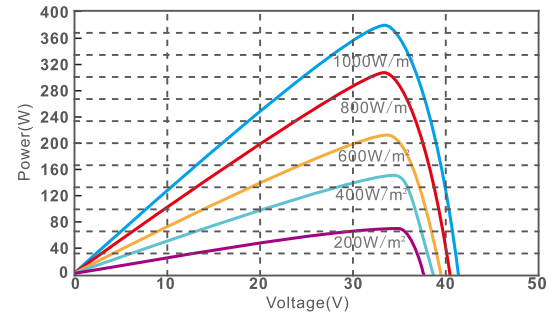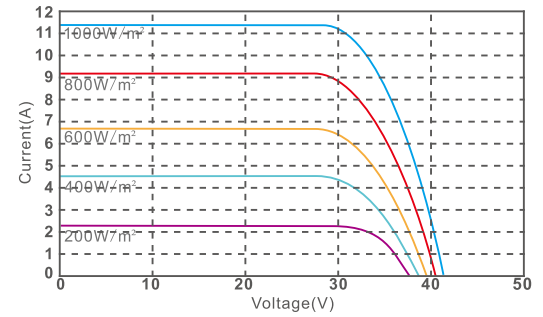

I-V characteristics at different temperature

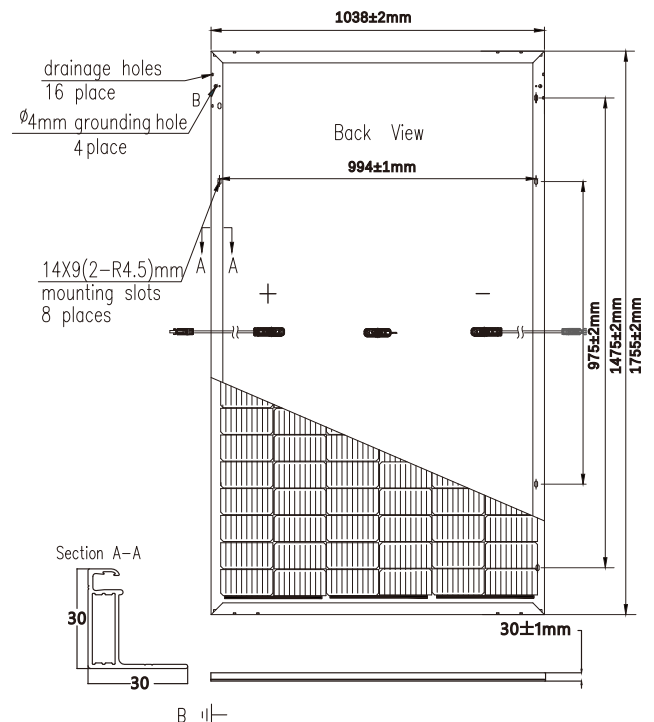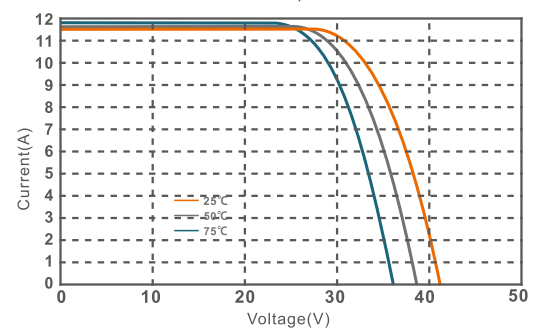

Specifications included in this datasheet are subject to change without notice.

Ulica Solar reserves the right of final interpretation.

Version No.: UL-1755-120HVHHC-30-KC-EN1.1