

Mate Pro series

Singe Glass Mono-Facial N-Type TOPCon Solar Module

595~620 Watt

Model: UL-***M-132DHVN

Maximum Efficiency: **22.95%**



Outstanding Mechanical load Resistance

2400 Pa wind load, 5400 Pa snow load



Longer Term Reliability

Successfully passed TUV IEC test



Lower LCOE

Lower shading and resistive loss Lower temperature coefficient

PID FREE



Anti-PID(potential induced degradation)

Passed anti-PID test under 85°C damp heat 85% relative humidity for 96 hours



Widely Applied To Various Scenarios

Flexibly applied to roofs, ground surfaces, water surfaces, mountainous areas, and other diverse environments

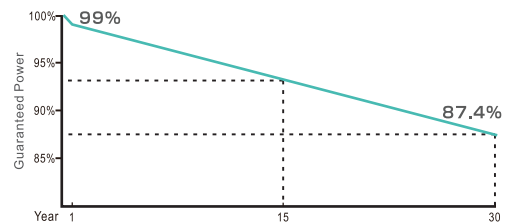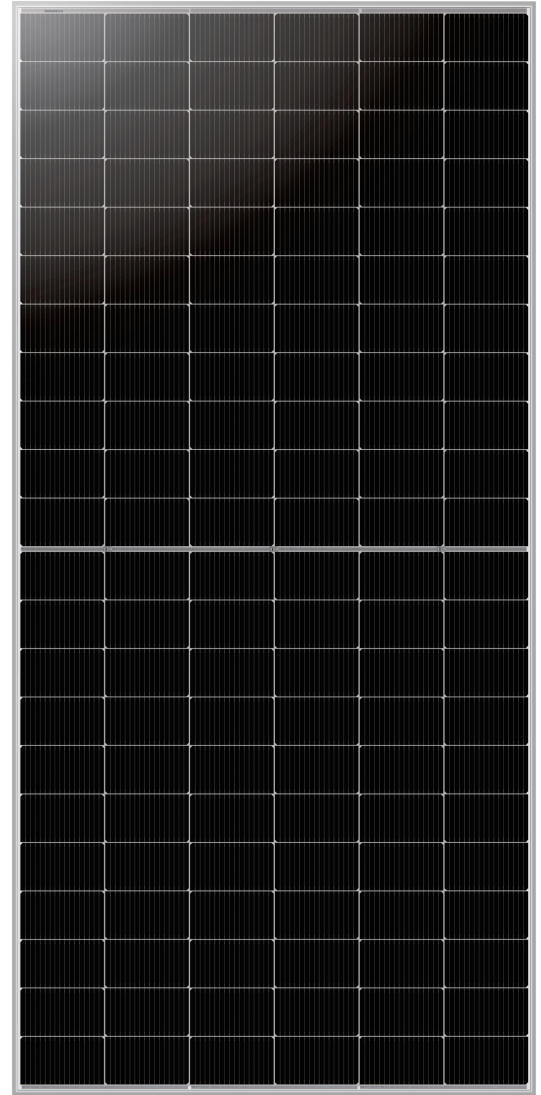

15 Year Product Warranty **1%** Power Degradation In The First Year

30 Year Linear Power Warranty **0.4%** Linear Power Degradation



CEC Listed



IEC 61215, IEC 61730

ISO 9001: 2015(Quality management systems)

ISO 14001: 2015 (Environmental management systems)

ISO45001: 2018 (Occupational health and safety)

UNI 9177 Ia CLASSE DI REAZIONE AL FUOCO:1



Add:No.238 Yunlin Middle Road,Ningbo China

TEL:+86-574-28828999

Email:sales@ulsolar.com.cn

MONO-FACIAL MODULE 595~620Watt



ELECTRICAL SPECIFICATIONS

Module Type	UL-595M-132DHVN		UL-600M-132DHVN		UL-605M-132DHVN		UL-610M-132DHVN		UL-615M-132DHVN		UL-620M-132DHVN		
	STC*	NOCT*	STC*	NOCT*	STC*	NOCT*	STC*	NOCT*	STC*	NOCT*	STC*	NOCT*	
Maximum Power(Pmax)	W	595	451	600	455	605	458	610	462	615	466	620	470
Maximum Power Voltage(Vmp)	V	39.99	36.79	40.17	36.96	40.35	37.12	40.54	37.29	40.72	37.46	40.90	37.63
Maximum Power Current(Imp)	A	14.88	12.26	14.94	12.30	14.99	12.35	15.05	12.40	15.10	12.44	15.16	12.49
Open-circuit Current(Voc)	V	48.08	43.75	48.28	43.93	48.48	44.12	48.68	44.30	48.88	44.48	49.08	44.66
Short-circuit Current(Isc)	A	15.78	12.73	15.84	12.78	15.90	12.83	15.96	12.87	16.02	12.92	16.08	12.97
Module Efficiency STC	%	22.03		22.21		22.40		22.58		22.77		22.95	

*STC: Cell temperature: 25°C, Irradiance: 1000W/m², Air mass: 1.5G, Power measurement tolerance: ±3%
 *NOCT: Air temperature: 20°C, Irradiance: 1000W/m², Air mass: 1.5G, Wind speed: 1m/s

OPERATING PARAMETERS

Operating Temperature	-40°C~85°C
Maximum system voltage	DC1500V(IEC)
Maximum series fuse rating	25A
Nominal operating cell temperature	43±2°C
Power tolerance	0~+5Watt

TEMPERATURE RATINGS




Temperature coefficients of Pmax	-0.29%/°C
Temperature coefficients of Voc	-0.25%/°C
Temperature coefficients of Isc	0.046%/°C

SPECIFICATIONS

Cell Type	N-type TOPCon Mono Half Cell	
No. of cells	132(6×11×2)	
Dimensions	2382*1134*33mm	
Weight	27.6kg	
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass	
Frame	Anodized Aluminium Alloy	
Junction Box	IP68, 3 diodes	
Connector	MC4 Compatible: PV-UL608 or Original: MC4-EVO2 or others _____	
Cable Length (Including Connector)	4mm² Short Cable: (+)400/(-)200mm or Long Cable: (+)1400/(-)1400mm or Customized Length _____	

I-V CURVE

I-V characteristics at different irradiances (reference to 615 W)

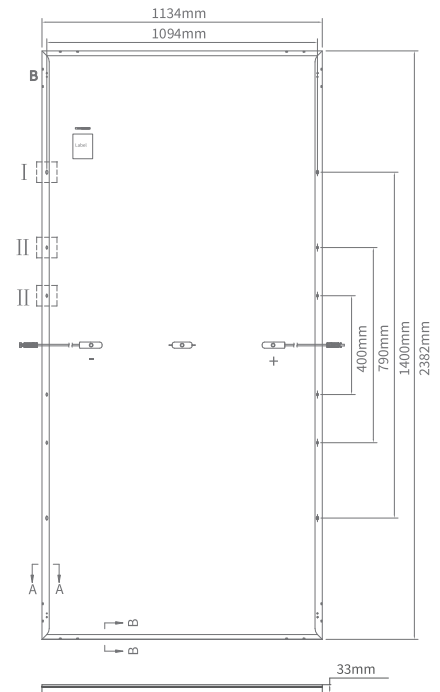

PACKAGING INFORMATION

33 Pcs/Pallet

66 Pcs/Stack


Length: 2390mm

Width: 1130mm

Height: 2540mm

Weight: 1904kg/Stack

10 Stack/40HQ
660Pcs/40HQ



Specifications included in this datasheet are subject to change without notice.

Ulica Solar reserves the right of final interpretation.

Version number: UL-2382-132DHVNBB-33-EN-V2.0